

digitalCAT

Online manual for the digitalCAT software

- [Getting Started](#)
 - [Installation](#)
- [Translation](#)
- [Editing](#)
- [Dictionaries](#)
- [Formatting](#)
- [Production](#)
- [Theory and Logic](#)
- [Commands](#)
 - [Tokens](#)
- [Advanced Features](#)
 - [Captioning](#)
 - [Dropbox Syncing](#)
 - [Network Editing](#)
- [Frequently Asked Questions](#)
- [Common Errors and Messages](#)

Getting Started

Getting Started

Installation

Translation

Editing

Dictionaries

Formatting

Production

Theory and Logic

Commands

Tokens

Paragraph Types

Question	{Q}
Answer	{A}
Colloquy	{C}
Centered	{P CENTER}
Continuation	{<}
Parenthetical	{P PAREN}
By Line	{P BY}

Text Formatting

Bold	{b}
Italics	{i}
Underline	{u}
Subscript	{B}
Superscript	{S}

Symbols

Hard Space	^
Tab	>
Musical Note	{M}

Miscellaneous

Current Time	{T}
Bookmarks	{K ???} (Replace ??? with the name of the Bookmark)
Include Files	{I ???} (Replace ??? with the name of the Include File)
Lowercase Letter	{l+} and {l-}

Advanced Features

Captioning

Advanced Features

Dropbox Syncing

Network Editing


Overview

Network Editor is Digital CAT extension that allows for scopist to edit and attorneys to view transcript in realtime with court reporter. Actually court reporter's computer is network server and all connected users are clients, so its configuration is similar to any other client/server applications in local network (LAN).

The most simple way to configure Network Editor is to provide WiFi router to put all participants in a same local network, but of course client can be located outside LAN (in this case the configuration is more complex, because to provide access to court reporter administrator have to establish VPN connection inside local network or open ports on external router).


It is also highly recommended temporary turn off Windows firewall on reporter's computer, to allow other participants to connect to it (or open port in firewall, but turn it off is much simpler). (Fig. 1.1)

To do this open Control Panel > Windows Firewall (Fig. 1.1)

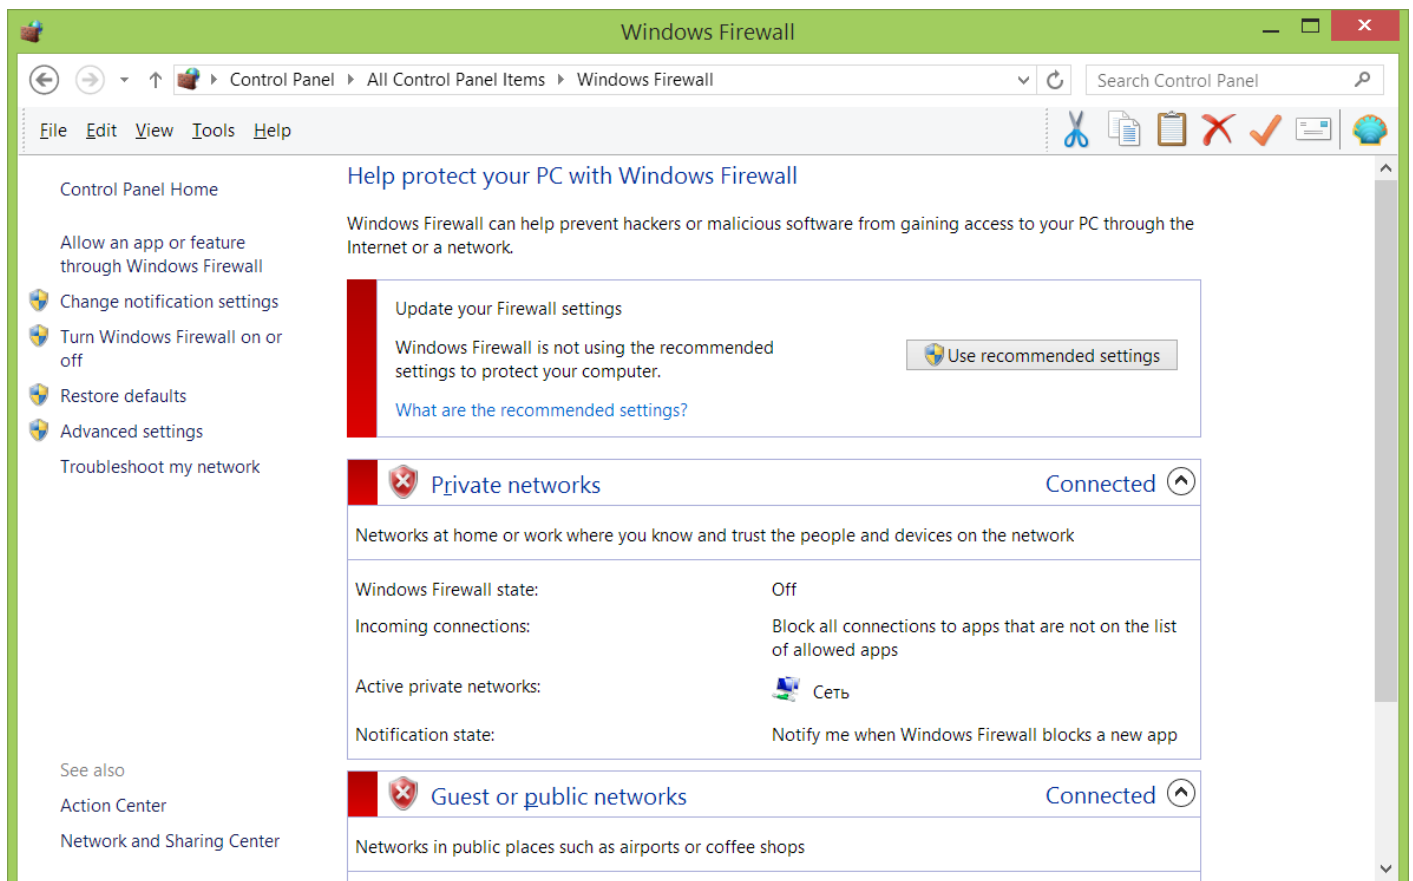


Configuring reporter's (server) computer

To configure server open Tools > Network Editor > Server dialog (Fig. 2.1.)

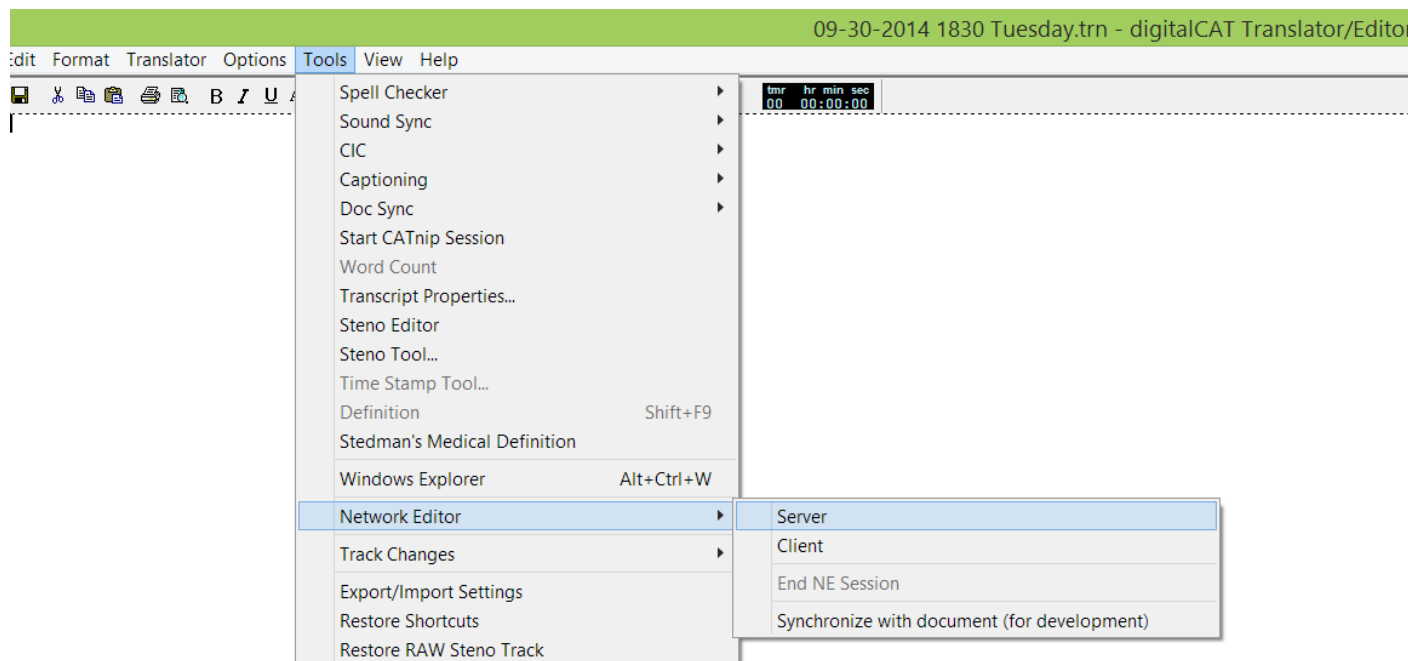

The following dialog will appear (Fig 2.2.)

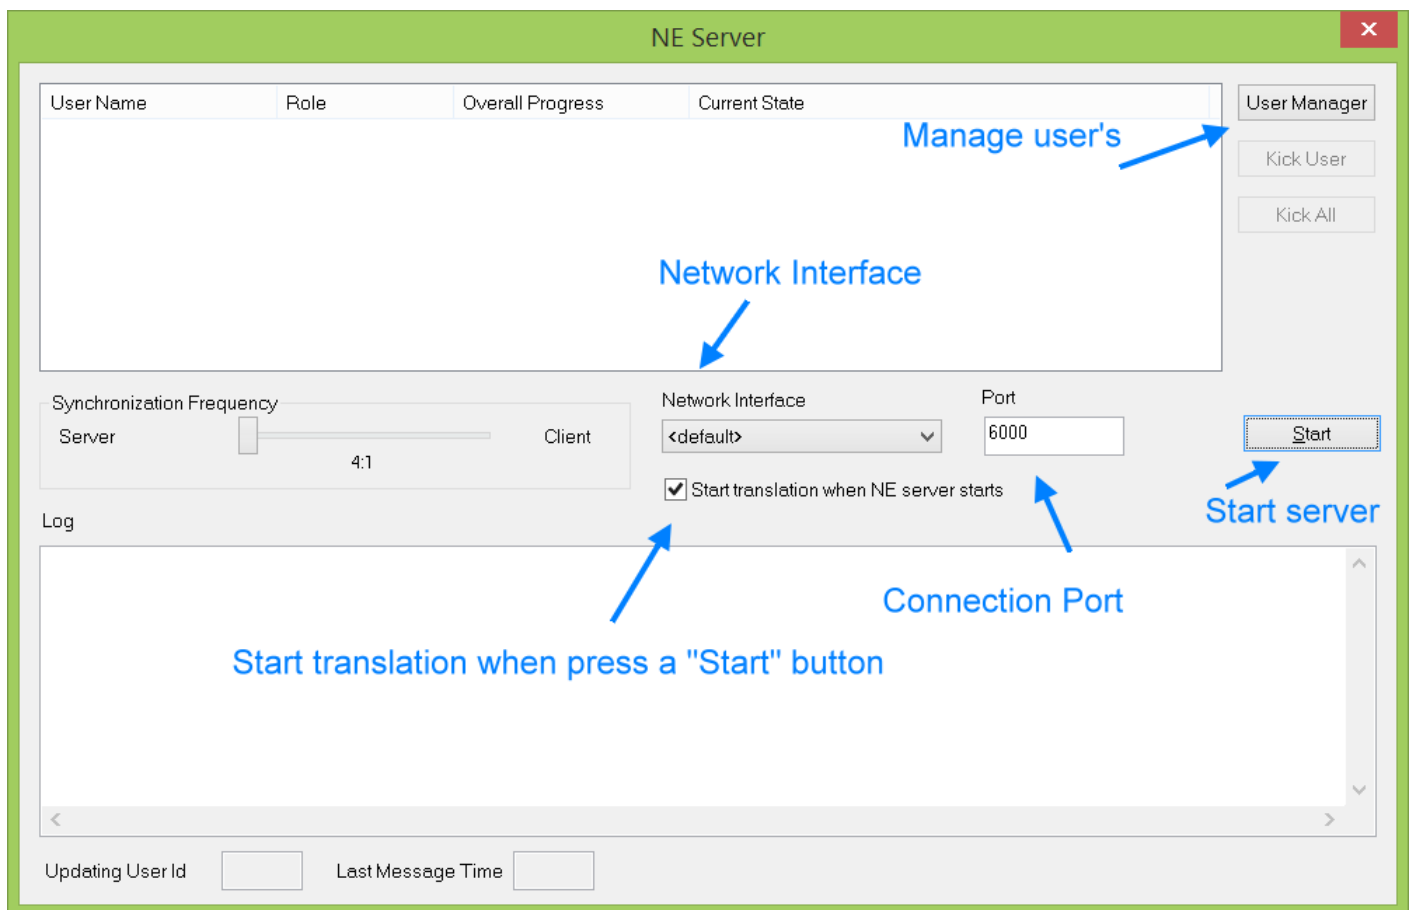

In most cases the only thing that requests your attention is "User Manager" button that allows to configure access to a server. But you can always adjust server's parameters by the following options:


"*Synchronization Frequency*" means how often participants send changes to each other. By default this is 4:1 meaning that changes done by reporter (server) has highest priority. I.e. server sends information about changes four times and once get changes from each scopist. This was done because reporter does the most changes in transcript, so providing him with priority will allow all participants to have the most up to date transcript, while scopist's changes will be provided with small delay.

"*Network Interface*" required only if you have any connection problems on computer with several network cards to select proper network card to bind to. In most cases "<default>" value should be OK.

"*Port*" is network port to connect to. I.e. to connect to server participants enter its address and connection port. There are few reasons to change it from default "6000" value, in case if administrator opened external port or there is any existing service on computer using port 6000, but in most cases you can leave it without changes.

"*Start translation when NE server starts*" calls "Translator" > "Start Translation" just after you press a "Start" button to start NE session, it is turned ON by default

"*User Manager*" allows reporter to configure access to its computer. (Fig 2.3.)

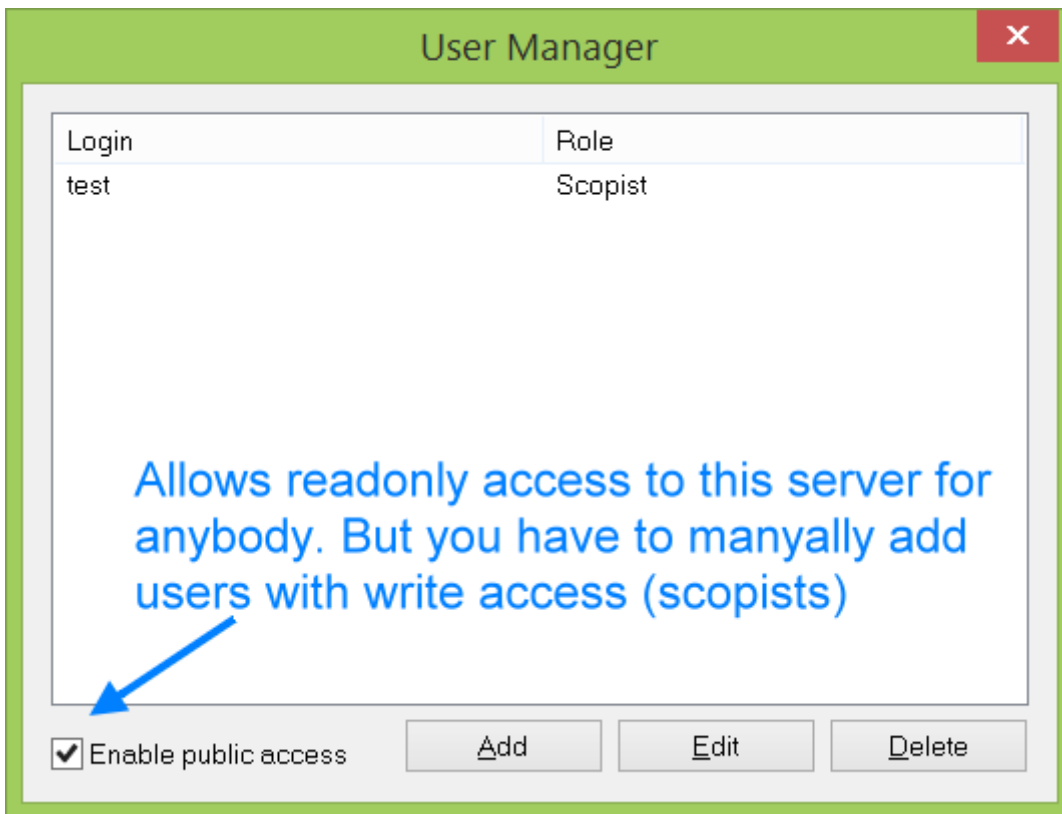

In this dialog you can create user accounts that will have access to your computer during realtime. There are two types of accounts available: "lawyer" that can only view transcript (readonly access) and "scopist" that can edit text in transcript.


It is recommended to keep "Enable public access" checkbox turned on, this allows users with any login/password connect to your computer in readonly (viewing) mode. So you can add only accounts for your scopists in this case, and provide attorneys just with address or your computer and port to connect.

If you don't want to allow public access to your computer turn off this option and add user accounts that required for connection.


Now you are ready to start, just press **"Start"** button to start network editor server.

Configuring scopist's (editor) or lawyer (viewer) computers

These two configurations are almost identical. Just open Tools > Network Editor > Client menu (Fig. 3.1.)

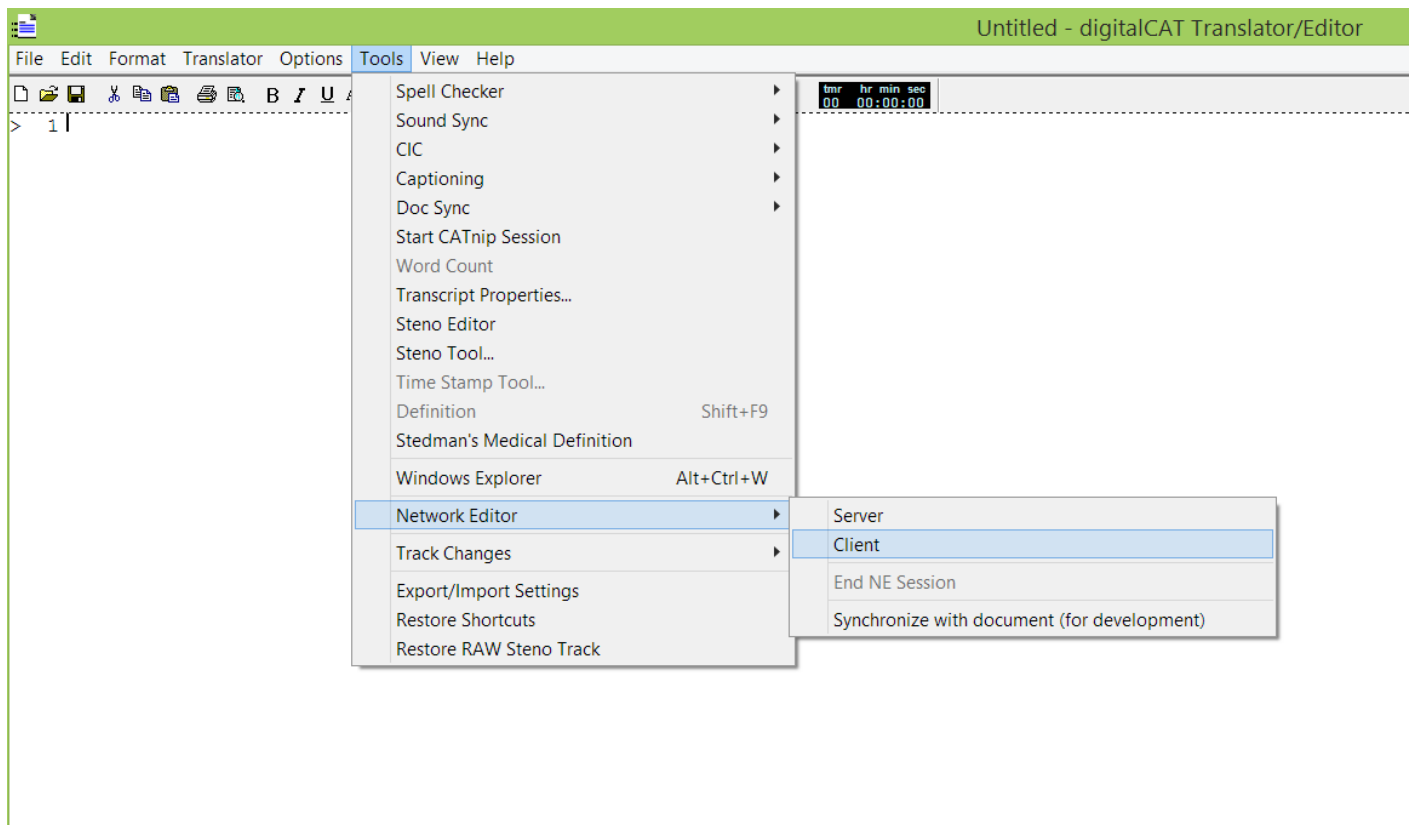

And provide login/password or your account with network IP address and port of a server. (Fig. 3.2.) If server has public access enabled you can provide any login password to access server in readoly mode, or you account login/password to access computer as a scopist (editor).

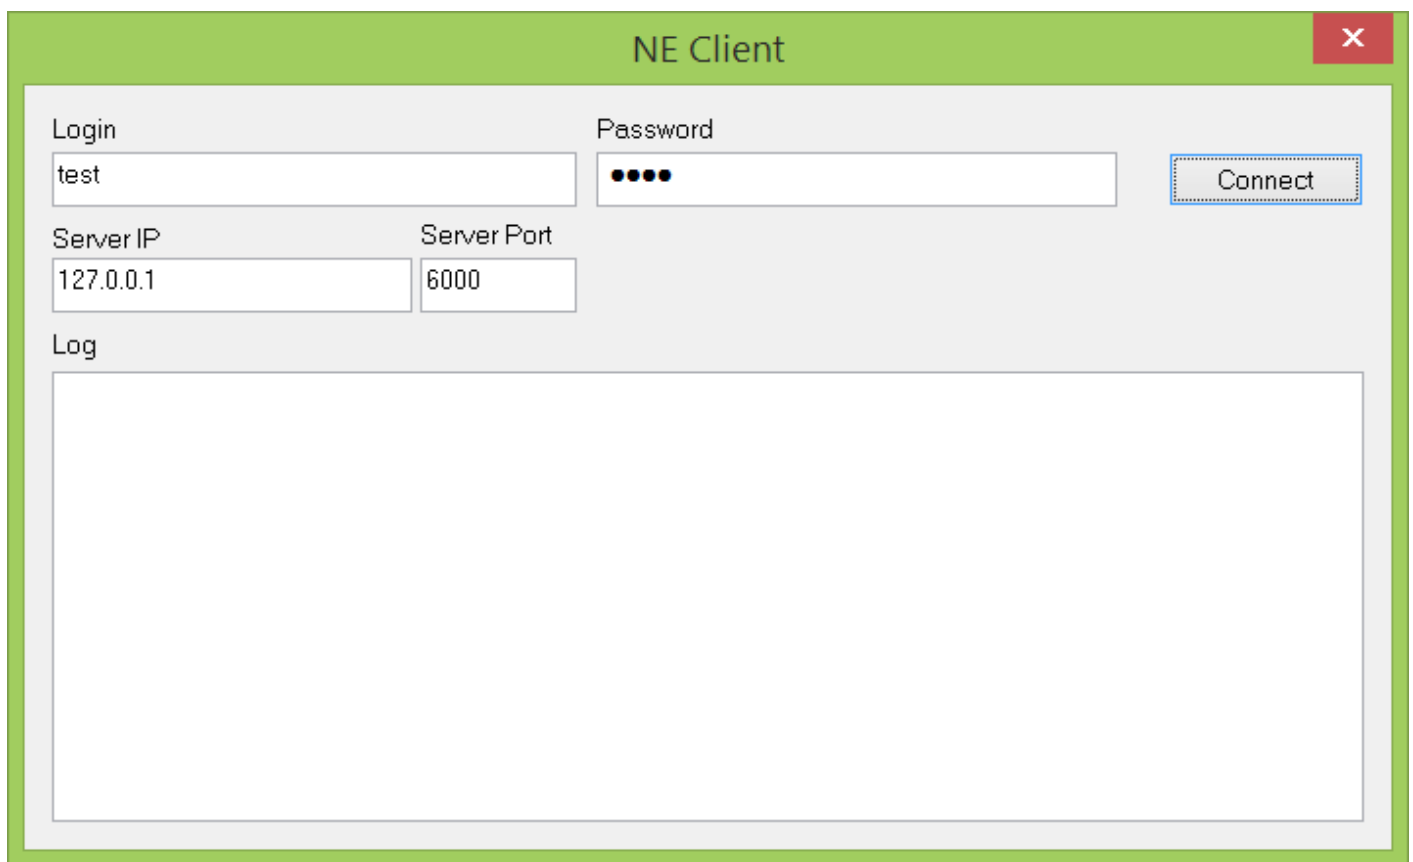

After that just press "Connect" button to connect to a server.

Advanced Topics

To view information about connected users onserver, just open server dialog again (Fig 4.1.)

NE Server

User Name	Role	Overall Progress	Current State
test (2)*	Scopist		Sending updated document to the client : 14

User Manager

Kick User

Kick All

Synchronization Frequency

ServerClient

4:1

Network Interface

<default>

Port

6000

Stop

☒ Start translation when NE server starts

Log

"C:\Users\Max\Documents\digitalCAT\Transcripts\09-30-2014 1933 Tuesday.trn.2" sending to "test (2)"
"C:\Users\Max\Documents\digitalCAT\Transcripts\09-30-2014 1933 Tuesday.trn.2" sending to "test (2)"
"C:\Users\Max\Documents\digitalCAT\Transcripts\09-30-2014 1933 Tuesday.trn.2" sending to "test (2)"
"C:\Users\Max\Documents\digitalCAT\Transcripts\09-30-2014 1933 Tuesday.trn.2" sending to "test (2)"
"C:\Users\Max\Documents\digitalCAT\Transcripts\09-30-2014 1933 Tuesday.trn.2" sending to "test (2)"
"C:\Users\Max\Documents\digitalCAT\Transcripts\09-30-2014 1933 Tuesday.trn.2" sending to "test (2)"
"C:\Users\Max\Documents\digitalCAT\Transcripts\09-30-2014 1933 Tuesday.trn.2" sending to "test (2)"
"C:\Users\Max\Documents\digitalCAT\Transcripts\09-30-2014 1933 Tuesday.trn.2" sending to "test (2)"
"C:\Users\Max\Documents\digitalCAT\Transcripts\09-30-2014 1933 Tuesday.trn.2" sending to "test (2)"

Updating User Id

2

Last Message Time

14

Frequently Asked Questions

Why does my transcript have black bars instead of text?

This section of the transcript has been redacted.

If you were not intending on redacting anything in the transcript, you can go to the **Edit** menu, then click on **Redaction**, then click on **Remove All Redaction**.

How do I install PDF Support?

The built-in PDF support module is no longer available. However, you can save a PDF by using the **Microsoft Print to PDF** option when going to print your transcript. This option does not print a paper copy of the transcript, but instead allows you to save your transcript to a PDF.

Common Errors and Messages

Activation related messages

License Manager error.

digitalCAT hasn't been given an activation code yet. This message can be safely ignored. You can [request an activation code](#) normally.

System time changed by more than one day. (Crack?)

The time and date on your computer has changed since digitalCAT was last opened.

Check the time and date is set correctly on your computer.

If you continue getting the error message, you will need to [contact Technical Support](#). Please make sure that you have internet access at that time, as a technician **will need to remote** to the computer in order to fix this issue.

Audio related messages

Media File seek position not found.

Wrong audio file

No driver.

No microphone connected.

Editing related messages

Autosave was slow to respond with a time of X milliseconds.

Something is causing digitalCAT to take an unusually long time to save the backup copies of your transcript.

If this message appears repeatedly, it may indicate that the auto save is set too frequently. Click on the **Options** menu, then click on **General**. Make sure the *Auto save every X minutes* is set to at least **5 minutes**.

If that doesn't resolve the issue, you may need to [reach out to Technical Support](#) for further troubleshooting. If you need to disable the message from appearing, you can click on the **Gear icon**, and then **uncheck** *Auto Save*.

Translation related messages

Writer port could not be opened. Make sure the port is valid, and no other program is using it.

digitalCAT isn't correctly configured for your writer, or the writer is not being detected by the computer.

Double check that your writer is correctly installed and being detected by your computer. **Right click** on your **Start button**, and click on **Device Manager**. In the list of categories, your writer should show up in either the *Ports (COM and LPT)* or the *Stenograph USB Writers* categories. Make a note of which category the writer is in, and the COM port number, if any. Then, configure digitalCAT by going to the **Translator** menu, then click on **Steno Source**.

If the writer was in the *Ports (COM and LPT)* category, set the *Primary Steno Device* to the appropriate **Realtime** based on the manufacturer of your writer, and put the COM port number into *Port 1*. Click **OK**.

If the writer was in the *Stenograph USB Writers* category, set the *Primary Steno Device* to **Stentura USB Realtime**. There is no need to set a port number in *Port 1*. Click **OK**.

You should then be able to start translation normally.

Writer could not be initialized. Please make sure it is correctly connected and turned on.

digitalCAT is unable to communicate correctly with your writer.

Double check that your writer is correctly installed and being detected by your computer. **Right click** on your **Start button**, and click on **Device Manager**. In the list of categories, your writer should show up in either the *Ports (COM and LPT)* or the *Stenograph USB Writers* categories. Make a note of which category the writer is in, and the COM port number, if any. Then, configure digitalCAT by going to the **Translator** menu, then click on **Steno Source**.

If the writer was in the *Ports (COM and LPT)* category, set the *Primary Steno Device* to the appropriate **Realtime** based on the manufacturer of your writer, and put the **COM port number** into *Port 1*. Click **OK**.

If the writer was in the Stenograph USB Writers category, set the Primary Steno Device to **Stentura USB Realtime**. There is no need to set a port number in *Port 1*. Click **OK**.

You should then be able to start translation normally.

Realtime has ended on writer.

Your writer has closed its realtime file, and needs to open a new one.

Press a couple of strokes on the writer, then open the **Translator** menu and click on **Stentura USB New File**.